




Boom Barrier - 300


Introduction :

TS-B-300 series barrier gate is driven by high-performance brushless DC motor, stable running, low noise, stable and reliable performance. The gate control system is rich in interfaces, widely used in all kinds of parking lot entrance and exit channel management.


Features :




Highly energy-efficient
because of the DC
Brushless motor




Digital control mainboard with
diverse configuration
possibilities



The barrier arm will
rebound when an
obstacle detected



Reversible boom
direction



Delay automatic close



Manual rise and fall in
case of absence of
power



Traffic light signal
output




Failure warning


Specifications :

Brand Name	TECHNOSPACIO
Model	TS-B-300
Operating Speed	1.5s to 6s
Boom Length	3m to 6m
Boom Type	Telescopic straight boom
Motor Type	DC 24V brushless motor
Output Power	150W
Operating Voltages	DC 24V
Power Supply	AC 220V/110V, 50Hz to 60Hz
Remote Control Distance	≤30m
Operating Temperature	-30°C to 75 °C
Protection Level	IP54
Dimensions (mm)	320*265*960mm
MCBF	7.5 million Cycle

Dimensions (mm):

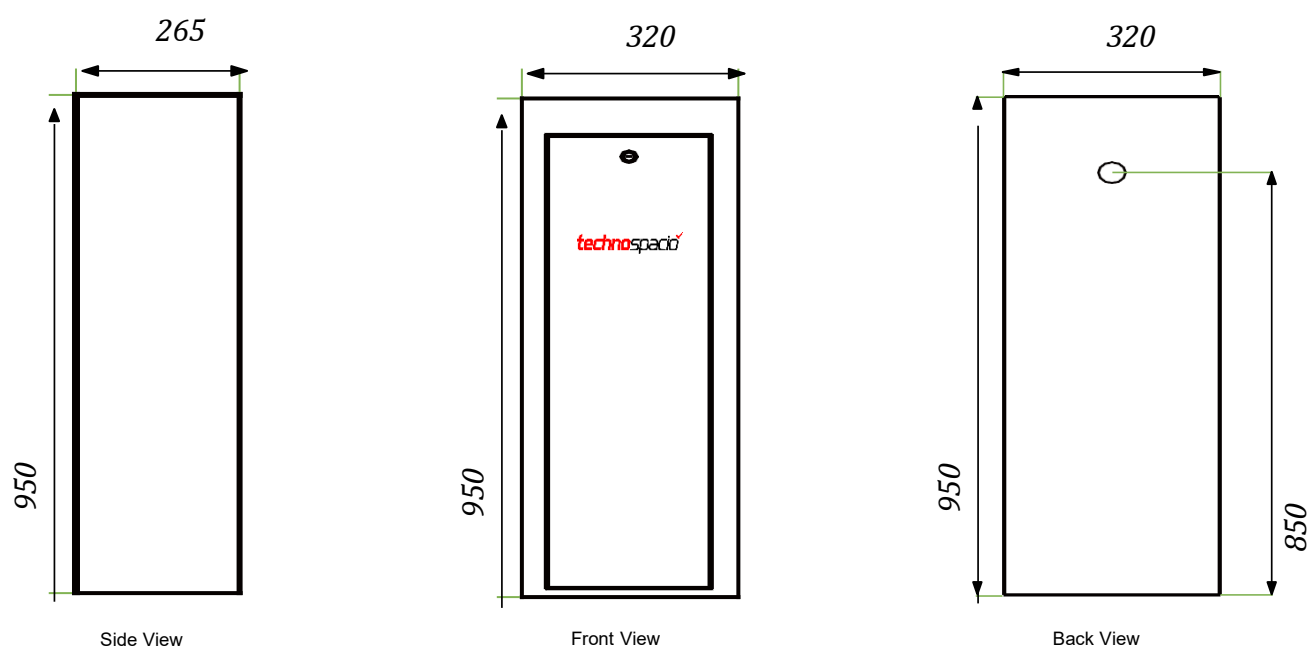

Components:

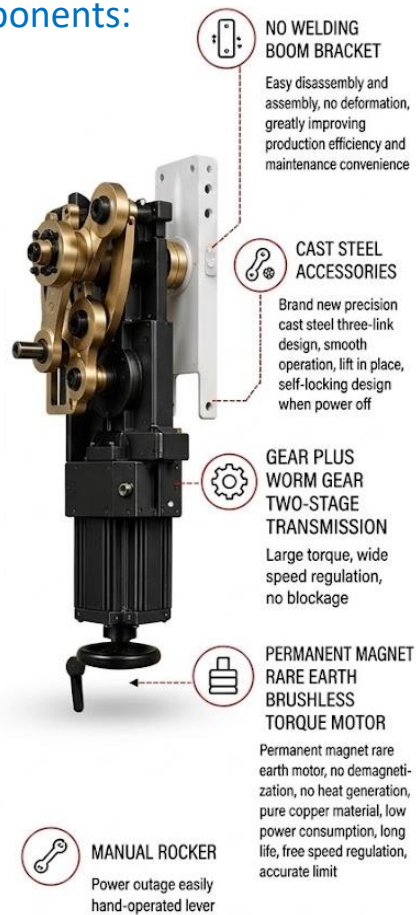

Advanced 24DC brushless DC motor technology engineered for high-speed operation, superior reliability, intelligent control, and long service life




Boom connector with snap-in system design(Optional)

✓ Foldable Arm



✓ Fence Arm

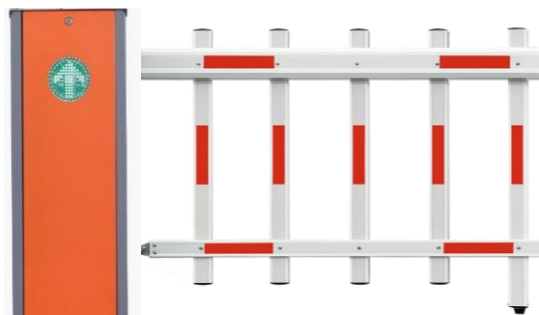

✓ Barrier Unlock




(Support customization, remark the total length from the order)

- Fold the barrier to the side vertically (Up to 90)
- Minimize damage and avoid accidents (Telescopic boom only)

Directions:



L : The chassis on the left, the boom on the right

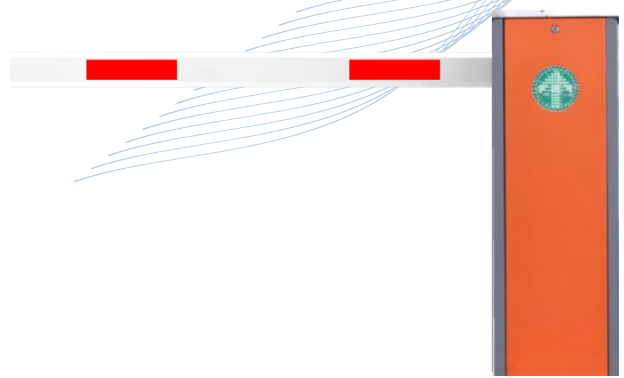

R : The chassis on the right, the boom on the left

Optional Accessories:



UHF 12



Loop Detector



Photo Cell



UHFStand



ANPR Camera



Manual Button